

MOMENTIVE™

**CoatOSil* and Silwet*
additives for high performance
coatings and inks**



Momentive Performance Materials' CoatOSil* and Silwet* coatings additives are used in a wide variety of industries and applications, including water and solvent-borne coatings, high solids, powder and UV/EB cure coatings, as well as inks. These products may offer multiple advantages:

- Enhanced flow & leveling (eliminate defects)
- Improved slip (reduce coefficient of friction)
- Increased mar resistance
- Control of foam and enhanced air release
- Improved substrate wetting
- Increased gloss
- Anti-blocking (release)

There are three main types of additives: silicone-polyether block copolymers, trisiloxanes and reactive silicone additives.

Silicone-polyether block copolymers

Most of the CoatOSil and Silwet additives fall into this category. They have a pendant (grafted) architecture (Figure A) or a linear (ABA) structure (Figure B).

By varying m, x, y and z, a tremendous variety of properties can be achieved.

These CoatOSil silicone-polyethers can have a strong effect, at low concentration, on most types of coatings. The silicone part of the molecule helps provide low surface tension, high

surface activity. The effect of a silicone-polyether depends on the type and amount of polyether it contains:

- A molecule with significant silicone content will increase slip and mar resistance; if the silicone content is very high then the additive will act as a defoamer, and provide anti-blocking and release.
- A silicone with high polyethylene oxide content will be compatible with waterborne coatings and it can be even water-soluble (see table on the following page). Such additives help wetting, flow, and leveling of waterborne coatings, allowing the coating to be "overcoatable" while providing gloss retention.


- If the polyether consists of polypropylene oxide, then the copolymer will be compatible with solventborne and high solids coatings and inks and can be considered for use as a flow and leveling (anti-cratering) agent for such formulations.

Trisiloxanes

CoatOSil* and Silwet* trisiloxanes have special properties. These molecules are often called 'superspreaders,' because they are excellent wetting and spreading agents, especially in waterborne coatings and inks.


Reactive silicone additives

While most CoatOSil silicone additives act in a non-chemical manner, reactive silicone additives are exceptions due to their high surface activity. These CoatOSil additives react chemically with the resin and thus permanently modify the coating. In these products, the terminal group is an epoxy or an acrylic group.

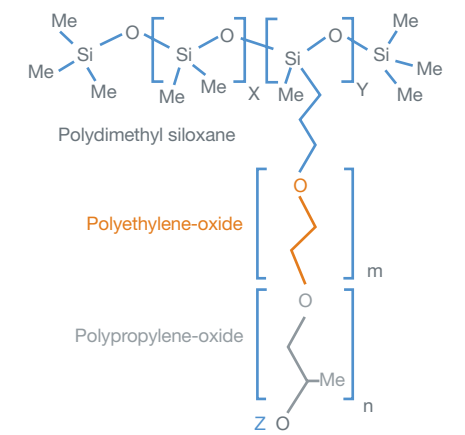


Silicone-polyether block copolymer-pendant structure

Figure A



Silicone-polyether block copolymer-linear structure

Figure B

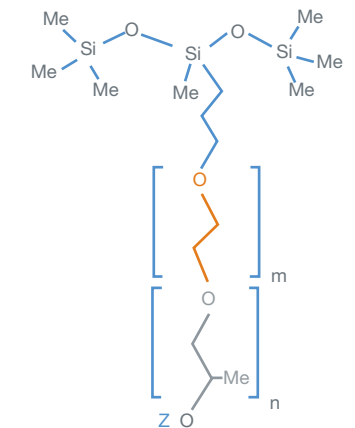

Trisiloxane structure

Figure C



Typical Properties

Product	Molecular Architecture	End-group (Z)	MW	Surface tension \diamond mN/m or dmy/cm ²	Polyether type	Solubility $\diamond\diamond$ in Water	In Hexane	Typical properties in various types of coatings and inks $\diamond\diamond\diamond$			
								Waterborne	Solventborne and high solids	UV/EB cure	Powder
CoatOSil* products:											
CoatOSil 1211 ⁽¹⁾	N/A	N/A	N/A	20.5	N/A	DII	SSD	Wetting, F/L substrate wetting, air release	Wetting, F/L substrate wetting, air release	Wetting, F/L, substrate wetting, air release	
CoatOSil 2400	Pendant	H	5000	35.6	All-EO	SSS	III	F/L, wetting	F/L	F/L	F/L, gloss
CoatOSil 2812	Linear	H	2000	26.6	All-EO	SDD	SII	Slip, mar resist, COF reduction; defoaming	Defoaming, COF reduction, slip, mar resistance		
CoatOSil 2816	Linear	Me	3,000	29.6	EO/PO	SSS	SDD	Slip, mar resist	F/L	F/L	
CoatOSil 3500	Linear	H	2100	25.4	All-EO	SSS	III	F/L, slip	Substrate wetting, defoaming, F/L, gloss	F/L, COF reduction, slip, mar resistance	
CoatOSil 3501	Pendant	H	8000	Insoluble	All-EO	III	SSD	Defoaming, antiblocking, COF reduction	Defoaming, antiblocking, COF reduction	Defoaming, COF reduction, slip, mar resistance	
CoatOSil 3505	Linear	H	2800	Insoluble	All-PO	III	SSS	Defoaming, slip	F/L, slip, mar resist, gloss retention, defoaming	COF reduction, mar resistance, slip	
CoatOSil 3573	Pendant	Me	10,000	Insoluble	All-EO	III	SSI	Defoaming, antiblocking, slip	Defoaming, antiblocking, slip, COF reduction	Defoaming, COF reduction, slip, mar resistance	
CoatOSil 7001 ⁽²⁾	Pendant	Me	20,000	28.2	EO/PO	SDD	III	F/L	Wetting, F/L	F/L	
CoatOSil 7500	Pendant	Bu	3000	Insoluble	All-PO	III	SSS	Defoaming	F/L, wetting, gloss	F/L, gloss	
CoatOSil 7510	Pendant	H	13,000	Insoluble	All-PO	III	SSS	Defoaming	F/L, defoaming	Defoaming	
CoatOSil 7600	Pendant	Me	4000	25.1	All-EO	SSS	III	F/L	F/L		
CoatOSil 7602	Pendant	Me	3000	26.6	All-EO	DDD	SII	Slip, mar resist, F/L, antiblocking	Slip, COF reduction, mar resistance		
CoatOSil 7604	Pendant	H	4000	25.4	All-EO	SSS	III	F/L, wetting	F/L	F/L	
CoatOSil 7605	Pendant	Me	6000	30.2	All-EO	SSS	III	F/L, wetting, gloss	F/L, gloss	F/L	F/L, gloss
CoatOSil 7650	Pendant	H	3000	23.2	All-EO	SDD	III	Slip, mar resist	F/L		
CoatOSil 77	Trisiloxane	Me	600	20.5	All-EO	DDD	SSS	Air release, wetting, substrate wetting F/L	Wetting, substrate wetting, F/L, air release	F/L, substrate wetting, air release	
CoatOSil* 7608	Trisiloxane	H	600	21.4	All-EO	SDD	III	F/L, gloss, air release	Air release, wetting, F/L, gloss	F/L, gloss, wetting, air release	
Silwet* products:											
Silwet L-7200	Pendant	H	19,000	34.2	EO/PO	SSS	III	F/L, wetting	F/L		
Silwet L-7210	Pendant	H	13,000	30.3	EO/PO	SDD	III	Defoaming, slip	F/L		
Silwet L-7220	Pendant	H	17,000	26.8	EO/PO	DDD	SSS	Defoaming	F/L, gloss		
Silwet L-7230	Pendant	H	29,000	32.4	EO/PO	SSS	III	Defoaming	F/L		
Silwet L-7280	Trisiloxane	H	600	21.5	EO/PO	DDD	SSD	Air release, wetting, substrate wetting	Substrate wetting, air release	F/L, substrate wetting, air release	
Silwet L-7550	Trisiloxane	H	400	Insoluble	All-EO	III	SSS	Defoaming	Air release, wetting		
Silwet L-7607	Pendant	Me	1000	23.4	All-EO	SSS	SII	Substrate wetting, F/L, wetting	Wetting, substrate wetting	F/L, wetting	
Silwet L-8610	Linear	H	1700	25.7	All-EO	SDI	SII	Defoaming, antiblocking	Defoaming, F/L, antiblocking		
Epoxy reactives:											
CoatOSil MP200	N/A	Epoxy/Silanol	N/A	Insoluble	No polyether			Crosslinking			

S: soluble; D: dispersible; I: insoluble; EO: Polyethylene-oxide; PO: polypropylene-oxide; COF: coefficient of friction; F/L: flow and leveling
 (1) Blend of various silicone-polyethers.
 (2) 75% actives

\diamond 0.1% aqueous solution, ambient temperature, using Du Nouy Ring or Wilhelmy plate method
 $\diamond\diamond$ At 77°F (25°C), solubility at 0.1%, 1% and 5%.
 $\diamond\diamond\diamond$ Properties in bold are most typical

Typical properties are average data and should not be used as or to develop specifications.

Choosing a CoatOSil* or Silwet* additive for the job

The effect of silicone additives on a coating strongly depends on their mutual compatibility. Compatibility is controlled by the amount of polyethylene oxide (EO), polypropylene oxide (PO) and polydimethylsiloxane (PDMS) in a molecule. This is illustrated for Momentive CoatOSil and Silwet additives products in the triangle diagram below.

Most properties (except wetting) of a silicone-polyether additive can be predicted from their position on the triangle diagram. (For wetting, CoatOSil 1211 non-foaming wetting agent and trisiloxanes may typically be considered.)

Each vertex of the triangle respectively represents

- 1) 100% (pure) PDMS (silicone)
- 2) polyethylene oxide ("EO")
- 3) polypropylene oxide ("PO").

The base of the triangle represents polyalkylene oxide (no silicone).

Depending on its locus relative to the corners of the triangle, each CoatOSil or Silwet additive offers varying properties. For example:

- Additives at the top of the triangle have more silicone properties, such as defoaming, anti blocking, release and slip.
- Additives near the EO vertex are water soluble and are

good flow, leveling and wetting agents to consider, especially for waterborne systems (see table).

- Additives near the PO vertex are oil soluble (see table) and are good leveling agents to consider for solventborne and high solids coating and inks.

There are often multiple requirements for any particular application. For example, a coating might require good leveling, as well as improved mar resistance, with nonfoaming properties. In cases like this, the best additives to consider are often found in the midsection of the triangle (CoatOSil additives 3500, 7602, 7001, etc.)

Optimal CoatOSil or Silwet additive concentration depends on the type and

composition of the coating as well as the required functionalities of the silicone additive. A ladder study may be considered strongly, in order to find the optimum additive concentration.



Typical starting concentrations for a ladder study:

- For antifoaming: 0.1-0.2%;
- For slip and mar resistance: 0.5%
- For solvent borne flow and leveling: 0.5%
- For waterborne flow and leveling: 0.1-0.2%,

- For powder coatings: 0.2-0.3% and
- For radiation cured systems: 1% (based on the weight of the coating).

CoatOSil* additives are essentially silicone oil (polydimethyl siloxane). Most Silwet* and CoatOSil products are solventless (100% actives); most CoatOSil silicone-polyethers are soluble in methanol, acetone, xylenes, dimethyl-chloride and IPA;

and most of them are liquids at ambient temperature. The exceptions are CoatOSil 7605 additive and CoatOSil 2400 additive, which are waxy solids, making them especially to consider for use in powder coatings.

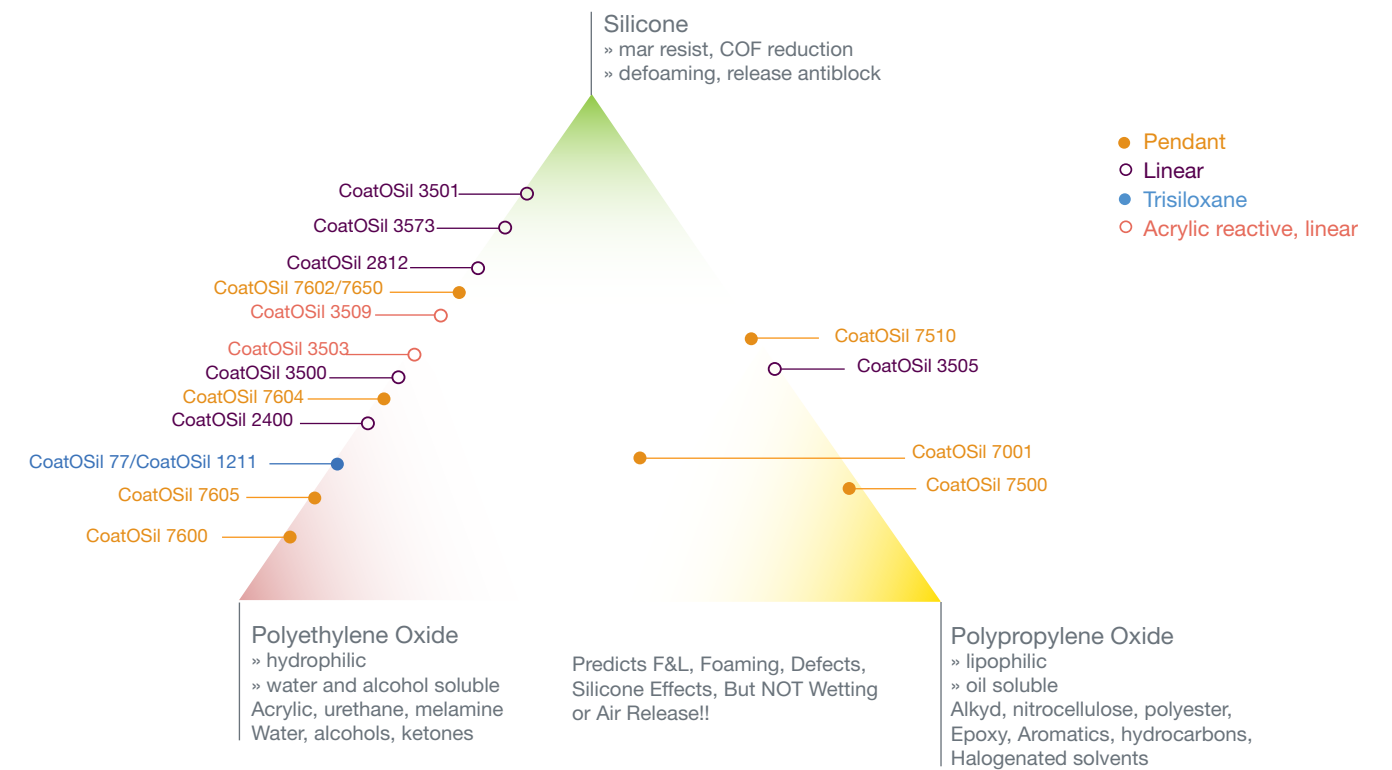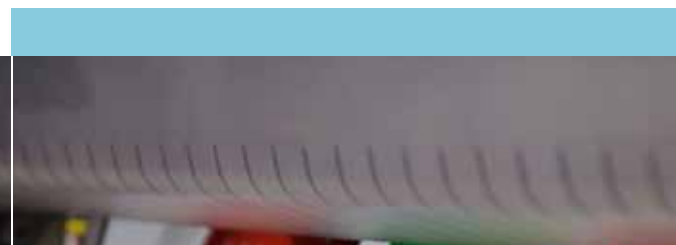

Customer Service Centers

Email

4information@momentive.com

Telephone

Americas

+1 800 295 2392
+1 614 986 2495

Europe, Middle East, Africa and India

+00 800 4321 1000
+40 212 534754

Asia Pacific

China

+800 820 0202

Japan

+81 276 20 6182

All Other Countries

+60 3 9206 1543

To find a specific language, visit the Contact Us page at Momentive.com. You may select a country to view additional languages and the corresponding telephone numbers.

For email inquiries, we will make every attempt to respond in the incoming written language. If that is not possible, we will respond in English.

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers should review the latest Material Safety Data Sheet (MSDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. MSDS are available at www.momentive.com or, upon request, from any MPM representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

DISCLAIMER:

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

*CoatOSil and Silwet are trademarks of Momentive Performance Materials Inc.

Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.



260 Hudson River Road
Waterford, NY 12188 USA
momentive.com